

PW3401

30V P-Channel MOSFET

-4.2A -30V; $R_{DS(ON)typ}=43m\Omega@-10V$, $R_{DS(ON)typ}=52m\Omega@-4.5V$,
 $R_{DS(ON)typ}=72m\Omega@-2.5V$


FEATURE

- TrenchFET Power MOSFET
- Exceptional on-resistance and maximum DC current capability


Application

- DC/DC Converter
- Load Switch for Portable Devices
- Battery Switch


MARKING:



SOT-23



Schematic diagram



ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current ^(1,5)	I_D	-4.2	A
Pulsed Drain Current ⁽²⁾	I_{DM}	-17	A
Power Dissipation ^(4,5)	P_D	1.5	W
Thermal Resistance from Junction to Ambient ⁽⁵⁾	$R_{\theta JA}$	83.3	$^\circ\text{C/W}$
Junction and Storage Temperature	T_J, T_{STG}	-55~ +150	$^\circ\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS(T_a=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-30			V
Zero gate voltage drain current	I _{DSS}	V _{DS} = -24V, V _{GS} = 0V			-1	μA
Gate-body leakage current	I _{GSS}	V _{GS} = ±12V, V _{DS} = 0V			±100	nA
Gate threshold voltage ⁽³⁾	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-0.7	-0.9	-1.3	V
Drain-source on-resistance ⁽³⁾	R _{DS(on)}	V _{GS} = -10V, I _D = -4.2A		43	65	mΩ
		V _{GS} = -4.5V, I _D = -4A		52	75	
		V _{GS} = -2.5V, I _D = -1A		72	90	
Forward tranconductance ⁽³⁾	g _{FS}	V _{DS} = -5V, I _D = -4.2A		10		S
Dynamic characteristics						
Input Capacitance	C _{iss}	V _{DS} = -15V, V _{GS} = 0V, f = 1MHz		954		pF
Output Capacitance	C _{oss}			115		
Reverse Transfer Capacitance	C _{rss}			77		
Switching characteristics						
Turn-on delay time	t _{d(on)}	V _{DD} = -10V, V _{DS} = -15V, R _L = 3.6Ω, R _{GEN} = 6Ω			6.3	ns
Turn-on rise time	t _r				3.2	
Turn-off delay time	t _{d(off)}				38.2	
Turn-off fall time	t _f				12	
Source-Drain Diode characteristics						
Diode forward current	I _S				-2	A
Diode pulsed forward current	I _{SM}				-15	A
Diode Forward voltage ⁽³⁾	V _{DS}	I _S = -4.2A, V _{GS} = 0V			-1.2	V


Notes:

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width ≤ 10μs, duty cycle ≤ 1%.
- 3.Pulse Test : Pulse Width ≤ 300μs, duty cycle ≤ 2%.
- 4.The power dissipation P_D is limited by T_{J(MAX)} = 150°C.
- 5.Device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A = 25°C.

Typical Electrical and Thermal Characteristics

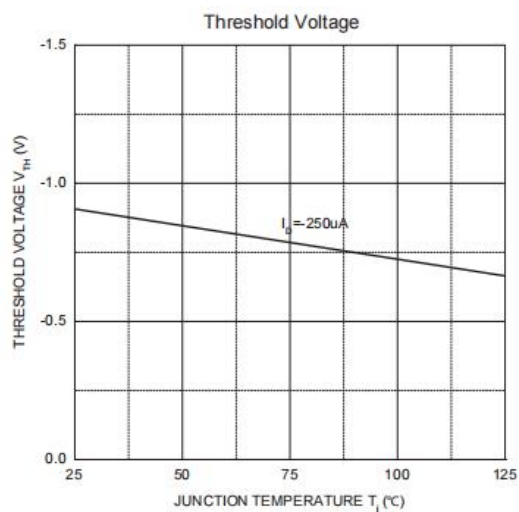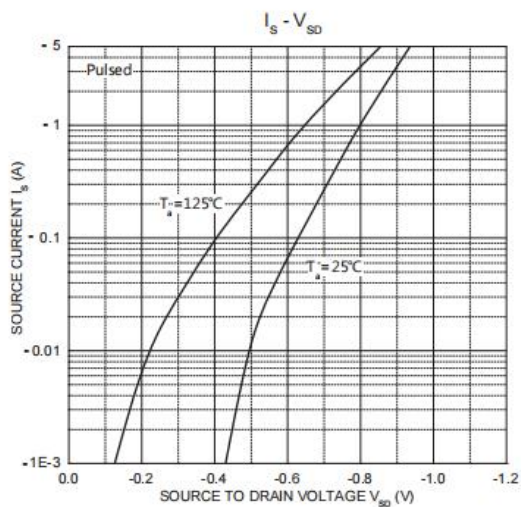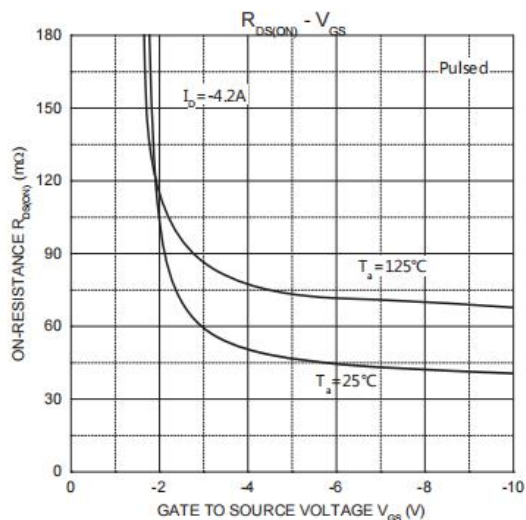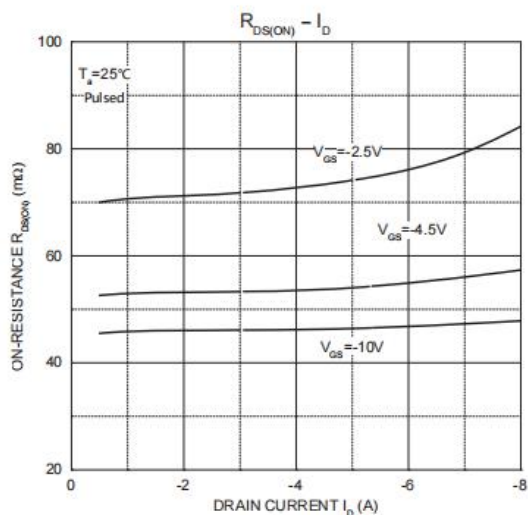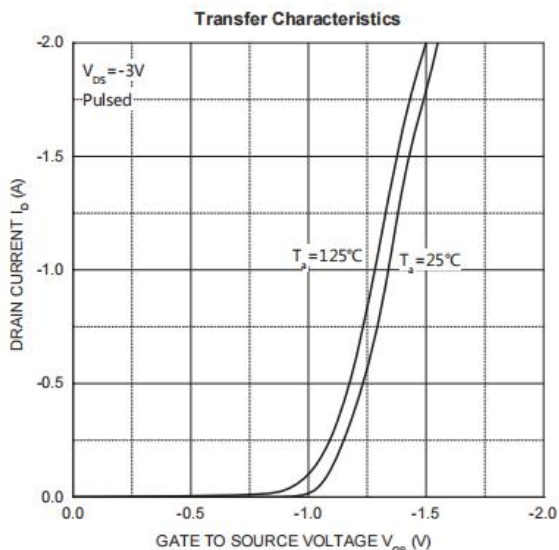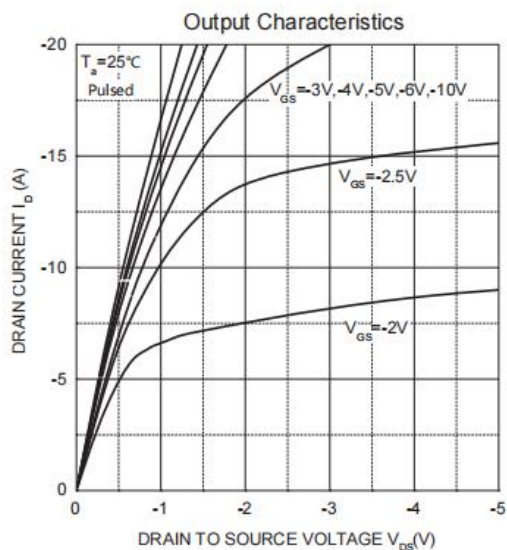


SOT-23 Package Information

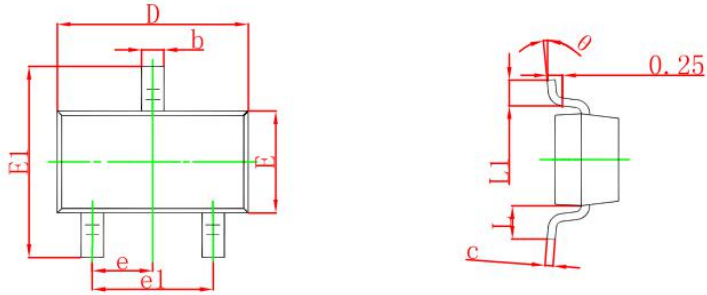

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°


SOT-23 Tape and Reel

SOT-23 Embossed Carrier Tape

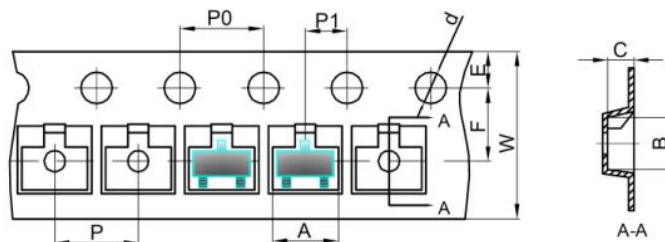


Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

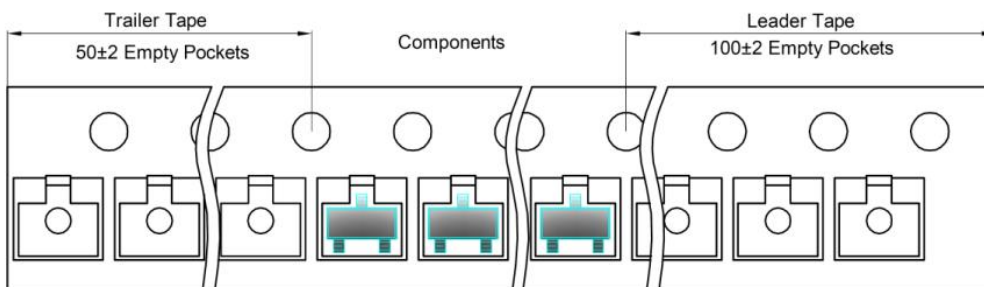

SOT-23 Reel

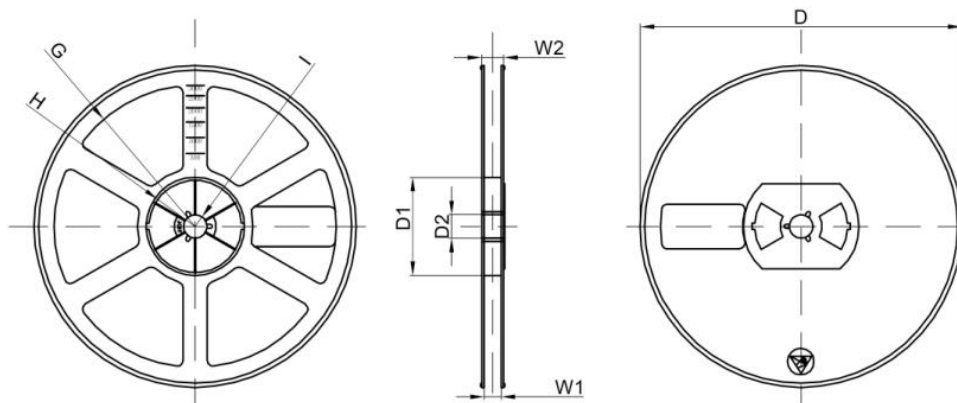

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	